


Tile Design	
Minimum Pitch (Max Rafter Length)	
Maximum Pitch	
Size of Tile	
Minimum Headlap (Max Gauge)	
Tile Thickness Overall Depth	
Cover width	
Covering Capacity (net)	
Weight of Tiling	
Quantity Per Pallet	
Battens Required	
Recommended Batten Size	
Underlay	
Tile Colours Available	

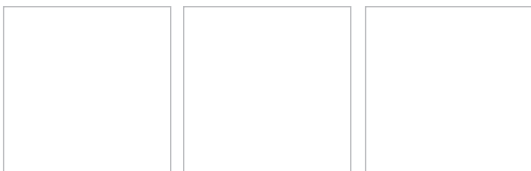

## Ventilation

Ventilation	
-------------	--

## Base Layers

Underlay	
----------	--

Batten	
--------	--

## Verge

Undercloak – Mortar Bedded	
----------------------------	--

Dry Verge	
-----------	--

## Eaves

Eaves	
-------	--

## Abutment

Side Abutment	
---------------	--

Top Edge Abutment	
-------------------	--

## Ridges

Ridge - Dry Fix	
-----------------	--

Ridge - Mortar Bedded	
-----------------------	--

Mono-Ridge – Mortar Bedded	
----------------------------	--

## Hips and Valleys

Hip – Mortar Bedded	
Hip – Dry Fix	
Valley	
Other products	

## Fixings

Fixing	
Clips	

## Other

Useful Links

Sustainability

Authority

British Standards

\*Some product codes have been published, if you require a code which is not present please contact our Technical Team on 01283 722230

\*\* This publication is based on the latest data available at the time of printing. Due to product changes, improvements and other factors, the Company reserves the right to change or withdraw information contained herein without prior notice. For specific applications users should refer to the Technical Advisory Service and relevant Standards and Codes of Practice for guidance. The photography shown in the document should not necessarily be taken as recommendations of good practice. The printing process restricts the exact representation of colours. For true colour reference, please request product samples.

<sup>1</sup>L TSA – The Lead Sheet Training Academy